

Strålkastare

GUELL LED

▽-märkt IP66


Upp till
150 lm/W
och **20%**
förbättrad effekt



GUELL O KIT LED

| Färg | E.nr | W | lm | K | Spridning |
|-------|-----------|----|------|------|------------|
| Svart | 77 617 11 | 15 | 1603 | 4000 | Symmetrisk |
| Vit | 77 617 50 | 15 | 1603 | 4000 | Symmetrisk |
| Svart | 77 647 93 | 28 | 3162 | 4000 | Symmetrisk |
| Vit | 77 647 94 | 28 | 3162 | 4000 | Symmetrisk |


L70 B10 150.000h
 Finns även i 3000K och 5000K.

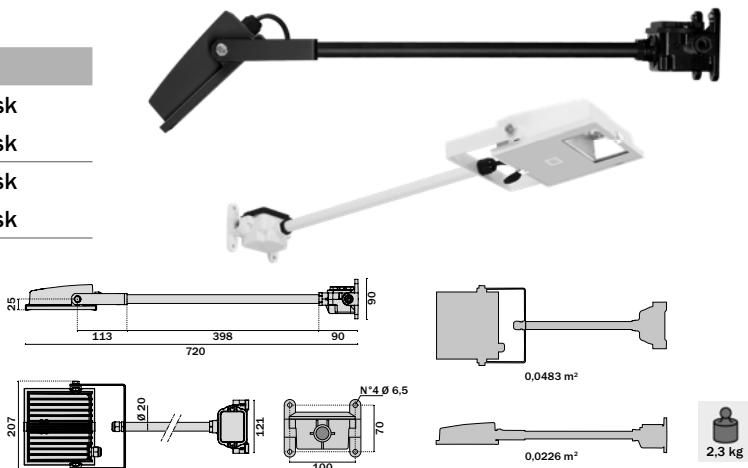

GUELL O LED

| Färg | E.nr | W | lm | K | Spridning |
|------|-----------|----|------|------|-----------------|
| Grå | 77 616 85 | 15 | 1603 | 4000 | Symmetrisk |
| Grå | 77 647 91 | 28 | 3162 | 4000 | Symmetrisk |
| Grå | 77 616 87 | 15 | 1589 | 4000 | Asymmetrisk 30° |
| Grå | 77 647 92 | 28 | 3167 | 4000 | Asymmetrisk 30° |



L70 B10 150.000h

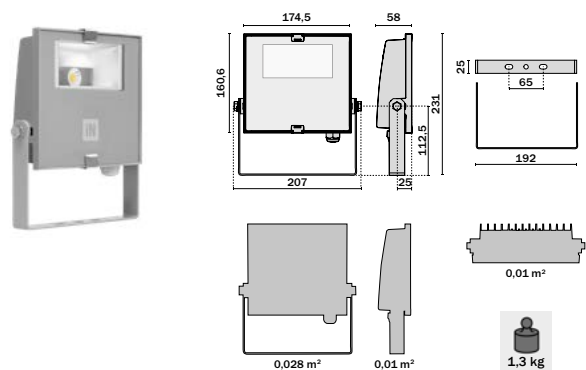

GUELL O SENSOR LED

| Färg | E.nr | W | lm | K | Spridning |
|------|-----------|----|------|------|-------------|
| Grå | 77 617 13 | 15 | 1589 | 4000 | Asymmetrisk |
| Grå | 77 647 95 | 28 | 3167 | 4000 | Asymmetrisk |


L70 B10 150.000h

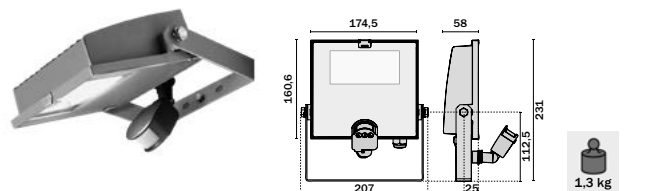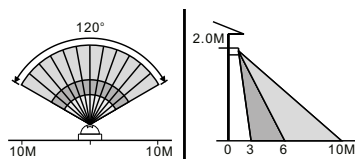

GUELL med sensor IP44.
 Spridning; ovan & sidan.



GUELL O KIT 15W

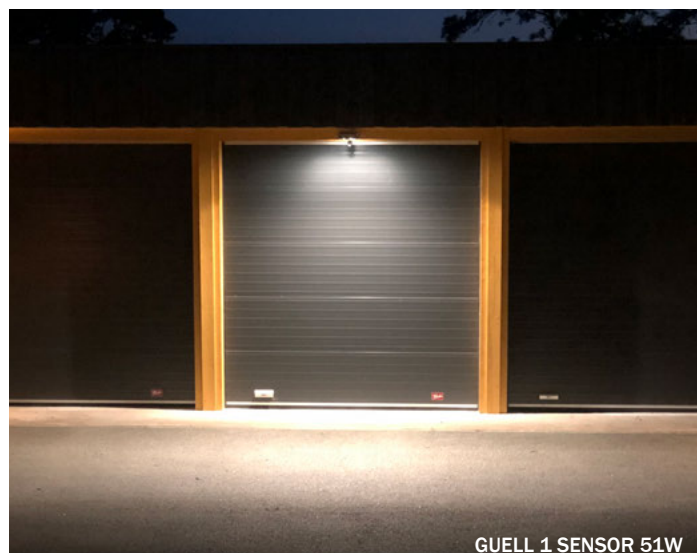



GUELL 1 SENSOR 51W

GUELL 1 LED

| Färg | E.nr | W | lm | K | Spridning |
|------|------------|----|------|------|-----------------|
| Grå | 77 616 37 | 36 | 5391 | 4000 | Symmetrisk |
| Grå | 77 616 36 | 51 | 6860 | 4000 | Symmetrisk |
| Grå | 77 616 39* | 36 | 5112 | 4000 | Asymmetrisk 40° |
| Grå | 77 616 38* | 51 | 6505 | 4000 | Asymmetrisk 40° |

L70 B10 150.000h


*DALI vid förfrågan.

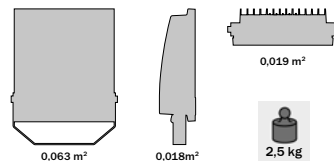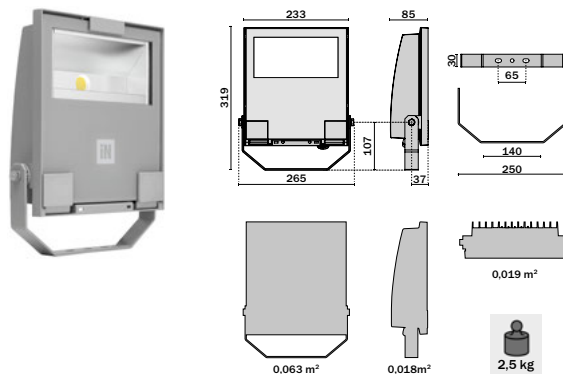



GUELL 1 LED SENSOR

| Färg | E.nr | W | lm | K | Spridning |
|------|-----------|----|------|------|-------------|
| Grå | 77 617 15 | 51 | 6505 | 4000 | Asymmetrisk |

L70 B10 150.000h

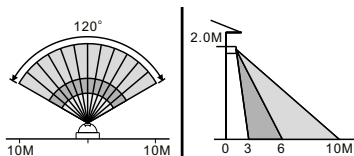

GUELL med sensor IP44.
Spridning; ovan & sidan.

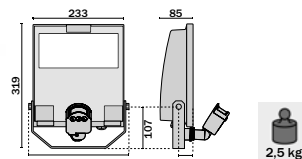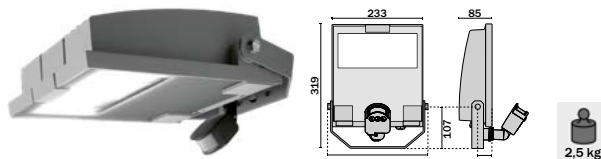

GUELL 2 LED



| Färg | E.nr | W | lm | K | Spridning |
|------|------------|-----|-------|------|-----------------|
| Grå | 77 616 35 | 74 | 10463 | 4000 | Symmetrisk |
| Grå | 77 616 34 | 103 | 13233 | 4000 | Symmetrisk |
| Grå | 77 668 90 | 149 | 20335 | 4000 | Symmetrisk |
| Grå | 77 616 29* | 74 | 10030 | 4000 | Asymmetrisk 40° |
| Grå | 77 616 32* | 103 | 13006 | 4000 | Asymmetrisk 40° |
| Grå | 77 668 91 | 149 | 20323 | 4000 | Asymmetrisk 40° |
| Grå | 77 664 87 | 80 | 10032 | 4000 | Asymmetrisk 50° |

74W L70 B10 150.000h

80W, 103W L70 B10 130.000h

149W L70 B10 100.000h

*DALI vid förfrågan.

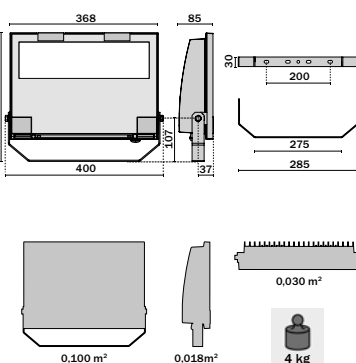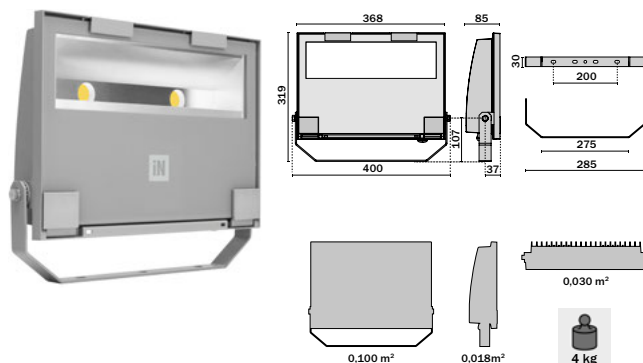

GUELL 2.5 LED



| Färg | E.nr | W | lm | K | Spridning |
|------|-------------|-----|-------|------|-----------------|
| Grå | 77 645 28 | 154 | 20345 | 4000 | Symmetrisk |
| Grå | 77 668 92 | 193 | 25323 | 4000 | Symmetrisk |
| Grå | 77 645 41** | 230 | 31072 | 4000 | Symmetrisk |
| Grå | 77 645 27 | 154 | 20027 | 4000 | Asymmetrisk 40° |
| Grå | 77 668 93 | 193 | 24501 | 4000 | Asymmetrisk 40° |
| Grå | 77 645 38** | 230 | 30536 | 4000 | Asymmetrisk 40° |
| Grå | 77 645 39* | 118 | 13862 | 4000 | Asymmetrisk 50° |
| Grå | 77 645 40* | 156 | 18453 | 4000 | Asymmetrisk 50° |

118W, 154W, 156W, 230W L70 B10 130.000h

193W L70 B10 100.000h

*DALI vid förfrågan.

** 1-10V

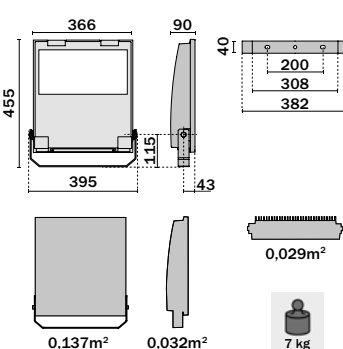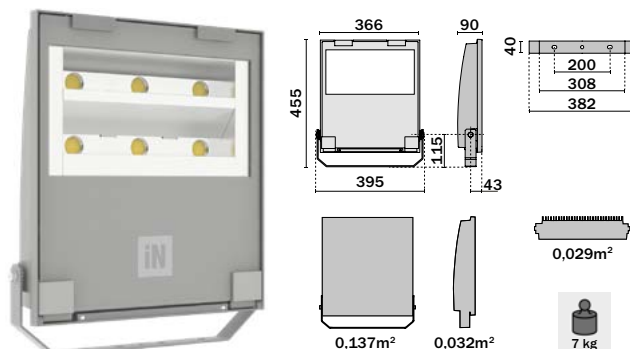

Överspänningsskydd


GUELL 3 LED

| Färg | E.nr | W | lm | K | Spridning |
|------|-------------|-----|-------|------|-----------------|
| Grå | 77 681 46** | 230 | 29074 | 4000 | Symmetrisk |
| Grå | 77 681 48** | 306 | 39738 | 4000 | Symmetrisk |
| Grå | 77 681 45** | 230 | 28423 | 4000 | Asymmetrisk 40° |
| Grå | 77 681 47** | 306 | 38046 | 4000 | Asymmetrisk 40° |
| Grå | 77 645 29* | 231 | 27496 | 4000 | Asymmetrisk 50° |
| Grå | 77 645 30* | 305 | 35814 | 4000 | Asymmetrisk 50° |

230W, 306W L70 B10 130.000h
 231W, 305W L80 B10 55.000h

*DALI vid förfrågan.

** 1-10V

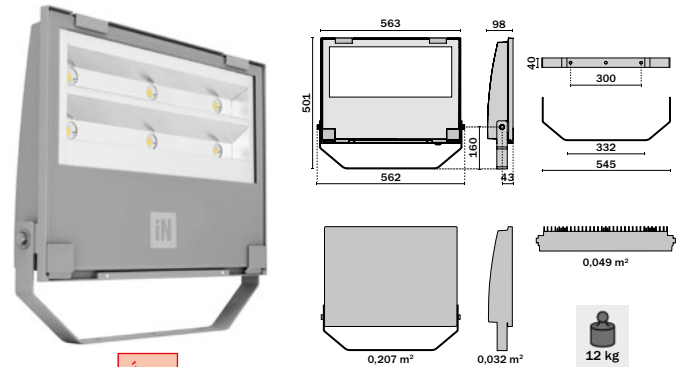


Överspänningsskydd

GUELL 4 LED

| Färg | E.nr | W | lm | K | Spridning |
|------|------------|-----|-------|------|-----------------|
| Grå | 77 624 76 | 413 | 55007 | 4000 | Symmetrisk |
| Grå | 77 624 75* | 413 | 50303 | 4000 | Asymmetrisk 40° |
| Grå | 77 645 31* | 448 | 52346 | 4000 | Asymmetrisk 50° |

413W L70 B10 130.000h
 448W L80 B10 55.000h

*DALI vid förfrågan.

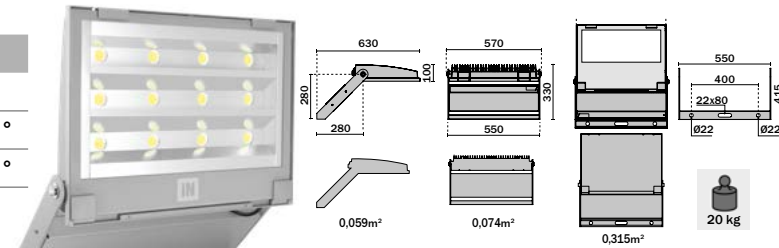

Överspänningsskydd

Montagehöjd GUELL Asymmetrisk 40° LED

| | | | |
|--|--|--|--|
| Höjd: 5m GUELL 1 LED 36W 77 616 39 10x10m = 20lux | Höjd: 6m GUELL 1 LED 51W 77 616 38 10x10m = 25lux | Höjd: 7m GUELL 2 LED 74W 77 616 29 15x15m = 20lux | Höjd: 8m GUELL 2 LED 103W 77 616 32 15x15m = 25lux |
| Höjd: 10m GUELL 2.5 LED 154W 77 645 27 20x20m = 20lux | Höjd: 12m GUELL 2.5 LED 230W 77 645 38 20x20m = 30lux | Höjd: 18m GUELL 3 LED 306W 77 681 47 25x25m = 25lux | Höjd: 24m GUELL 4 LED 413W 77 624 75 30x30m = 20lux |



GUELL 2 103W ASYM




GUELL 2 103W SYM

GUELL 1 LED Cirkulär

| Färg | E.nr | W | lm | K | Spridning |
|------|-----------|----|------|------|--------------|
| Grå | 77 643 39 | 39 | 5335 | 4000 | Cirkulär 20° |
| Grå | 77 643 40 | 52 | 6657 | 4000 | Cirkulär 20° |


L70 B10 150.000h

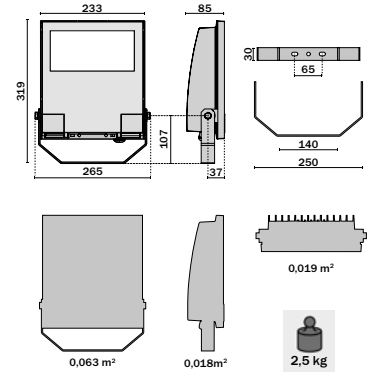

GUELL 2 LED Cirkulär

| Färg | E.nr | W | lm | K | Spridning |
|------|-----------|-----|-------|------|--------------|
| Grå | 77 643 41 | 72 | 9470 | 4000 | Cirkulär 20° |
| Grå | 77 643 42 | 101 | 11930 | 4000 | Cirkulär 20° |

L70 B10 150.000h

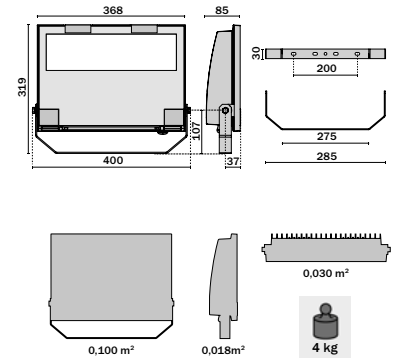


GUELL 2.5 LED Cirkulär

| Färg | E.nr | W | lm | K | Spridning |
|------|-------------|-----|-------|------|--------------|
| Grå | 77 645 42 | 156 | 18471 | 4000 | Cirkulär 20° |
| Grå | 77 645 43** | 232 | 29640 | 4000 | Cirkulär 20° |


L70 B10 130.000h

**1-10V

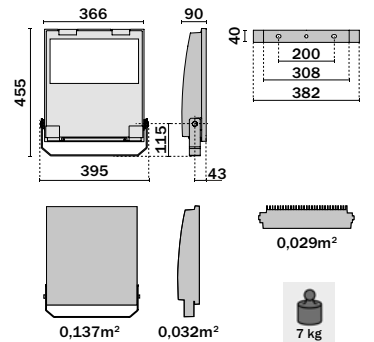


Ljusbild GUELL Cirkulär

GUELL 1 CIRKULÄR 20°

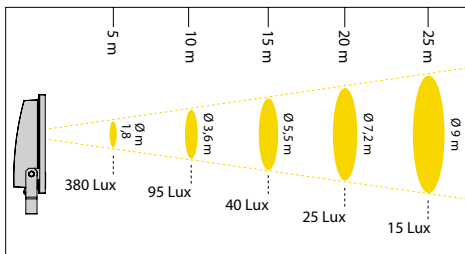


GUELL 1 Cirkulär 20° 39W

GUELL 2 CIRKULÄR 20°

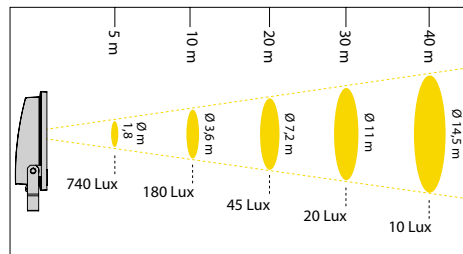


GUELL 2 Cirkulär 20° 72W


GUELL 2.5 CIRKULÄR 20°

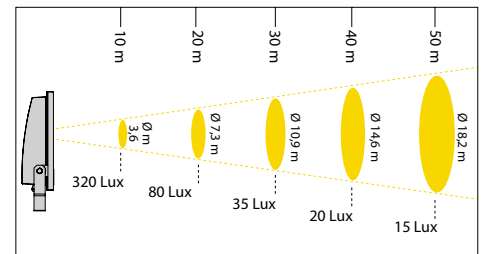


GUELL 2.5 Cirkulär 20° 156W

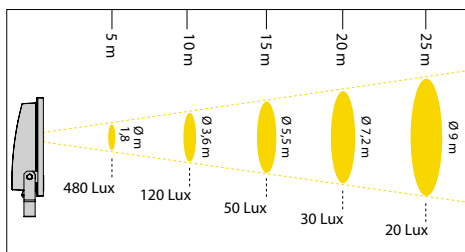

GUELL 1 Cirkulär 20° 52W

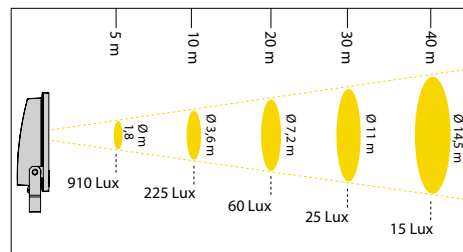

GUELL 2 Cirkulär 20° 101W

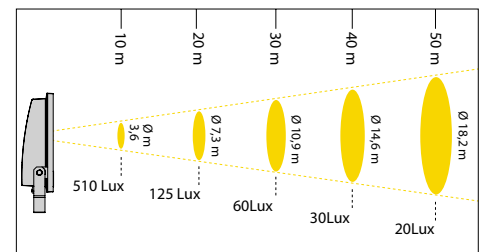

GUELL 2.5 Cirkulär 20° 232W

| Tillbehör | GUELL 0 | GUELL 1 | GUELL 2 | GUELL 2.5 | GUELL 3 | GUELL 4 |
|---|-----------|-----------|-----------|-----------|-----------|-----------|
| ¹ Väggarm galv 0,5m | | 77 651 33 | 77 651 33 | | | |
| ¹ Väggarm galv 1,0m | | 77 640 88 | 77 640 88 | 77 645 44 | 77 617 02 | |
| ² Skyddsgaller | | 77 616 41 | 77 615 57 | 77 645 47 | 77 616 98 | 77 616 98 |
| ³ Skärm | | | 77 616 56 | 77 645 48 | 77 616 99 | 77 616 99 |
| ⁴ Lamellbländskydd symmetriskt | | 77 616 42 | 77 616 40 | | | |
| ⁴ Lamellbländskydd asymmetriskt | | 77 616 43 | 77 615 58 | | | |
| ⁵ Röradapter Ø50 till 60mm | 77 617 77 | 77 617 77 | 77 617 77 | 77 617 77 | 77 617 77 | |
| ⁵ Röradapter Ø60 till 76mm | | 77 273 87 | 77 273 87 | 77 273 87 | 77 273 87 | |
| ⁶ Strålkastarbalk Ø60-76mm | 77 794 06 | 77 794 06 | 77 794 06 | 77 794 06 | 77 794 06 | 77 794 06 |
| ⁷ Stolptoppfäste, enkelt | | 77 616 66 | 77 615 62 | 77 645 45 | 77 617 00 | |
| ⁸ Stolptoppfäste, dubbelt | | 77 616 69 | 77 615 59 | 77 645 46 | 77 617 01 | |
| ⁹ Stolpfäste enkelt Ø60-76mm | 77 643 75 | 77 643 75 | 77 643 75 | 77 643 75 | | |
| ¹⁰ Stolpfäste dubbelt Ø60-76mm | 77 643 76 | 77 643 76 | 77 643 76 | 77 643 76 | | |
| ¹¹ T-balk till trästolpe | 77 794 51 | 77 794 51 | 77 794 51 | 77 794 51 | 77 794 51 | 77 794 51 |
| ¹² Fästplåt till armatur | 77 619 46 | 77 619 46 | 77 619 47 | 77 619 47 | 77 619 48 | |
| ¹³ Fästplåt till arm | | 77 624 24 | 77 624 24 | 77 624 24 | | |
| ¹³ Fästplåt till GUELL 0 KIT | 77 632 97 | | | | | |
| ¹⁴ Rörfäste till stolpe Ø60mm | 77 698 79 | 77 698 79 | 77 698 79 | | | |
| ¹⁵ Rörfäste m. fästplåt till arm | 77 644 60 | 77 644 61 | 77 644 61 | | | |
| ¹⁶ Ytterhörnfäste | | 77 625 99 | 77 625 99 | 77 625 99 | | |
| ¹⁷ Trevägsfäste Ø76mm | | 77 639 03 | 77 639 03 | 77 639 03 | 77 639 03 | |
| ¹⁸ Fyrvägsfäste Ø76mm | | 77 639 04 | 77 639 04 | 77 639 04 | 77 639 04 | |

